AGENDA ITEM
CA12

AGENDA PLACEMENT FORM

Send to: ccagenda@johnsoncountytx.org

Date: 9/8/2026

Meeting Date: 9/28/2026

Submitted By:

Department: County Judge's Office

Signature of Elected Official/Department Head:

Court Decision:
This section to be completed by County Judge's Office

Johnson County ★ ACKNOWLEDGED ★ Commissioners Court

9.28.2026

Description:
Acknowledgment of Receipt of Notification Regarding an Application of Brazos Electric Power Cooperative, Inc. to Amend its Certificate of Convenience and Necessity for the Proposed Egan to Highpoint 138 kV Transmission Line Rebuild Project in Johnson County. Public Utility Commission of Texas (PUC) Docket NO. 60157-County Judge's Office

(May attach additional sheets if necessary)

Person to Present:

(Presenter must be present for the item unless the item is on the Consent Agenda)

Supporting Documentation: (check one) ☐ PUBLIC ☐ CONFIDENTIAL

(PUBLIC documentation may be made available to the public prior to the Meeting)

Estimated Length of Presentation: _____ minutes

Session Requested: (check one)

☐ Action Item ☑ Consent ☐ Workshop ☐ Executive ☐ Public Announcement

Check All Departments That Have Been Notified:

☐ County Attorney ☐ IT ☐ Purchasing ☐ Auditor

☐ Personnel ☐ Development Services ☐ Facilities Management

Other Department/Official (list)

Please List All External Persons Who Need a Copy of Signed Documents In Your Submission Email

Approved in CC on 9/11/2023

BRAZOS ELECTRIC COOPERATIVE

7616 Bagby Ave.
Waco, TX 76712

August 31, 2026

Application of Brazos Electric Power Cooperative, Inc. to Amend its Certificate of Convenience and Necessity for the Proposed Egan to Highpoint 138 kV Transmission Line Rebuild Project in Johnson County

PUBLIC UTILITY COMMISSION OF TEXAS (PUC) DOCKET NO. 60157

To Whom it May Concern:

Brazos Electric Power Cooperative, Inc. (Brazos Electric) gives notice of its intent to amend its Certificate of Convenience and Necessity (CCN) to rebuild and install approximately 2.13 miles (mi) of the existing 138 kilovolt (kV) single-circuit transmission line to a double-circuit transmission line on concrete or steel monopole structures between the Egan Substation and the Highpoint Substation in Johnson County, Texas. Minor substation improvements may be required at both the Egan and Highpoint substations. The existing right-of-way (ROW) width is 60 feet, and approximately 0.69-acre of new ROW is required to construct the project. The project has an estimated cost of approximately $7,974,772.

Brazos Electric provides this notice in accordance with the requirements of 16 TAC § 22.52. On August 31, 2026, Brazos Electric filed an application with the Public Utility Commission of Texas (PUC) in Docket No. 60157 – *Application of Brazos Electric Power Cooperative, Inc. to Amend its Certificate of Convenience and Necessity for the Proposed Egan to Highpoint 138 kV Transmission Line Rebuild Project in Johnson County*.

For your convenience, we have included a map and a written description of the route filed with the application. If you have any questions about this transmission line project in PUC Docket No. 60157, you may contact me at (254) 750-6283 or clipscomb@brazoselectric.com or visit the project website at www.BrazosElectric-Egan-Highpoint.com. The deadline for intervention in the proceeding is **September 30, 2026**, and a letter requesting intervention should be received by the PUC by that date.


Sincerely,




Chase Lipscomb
Brazos Electric

Enclosures:

- Route Composition, Route Description, and Map

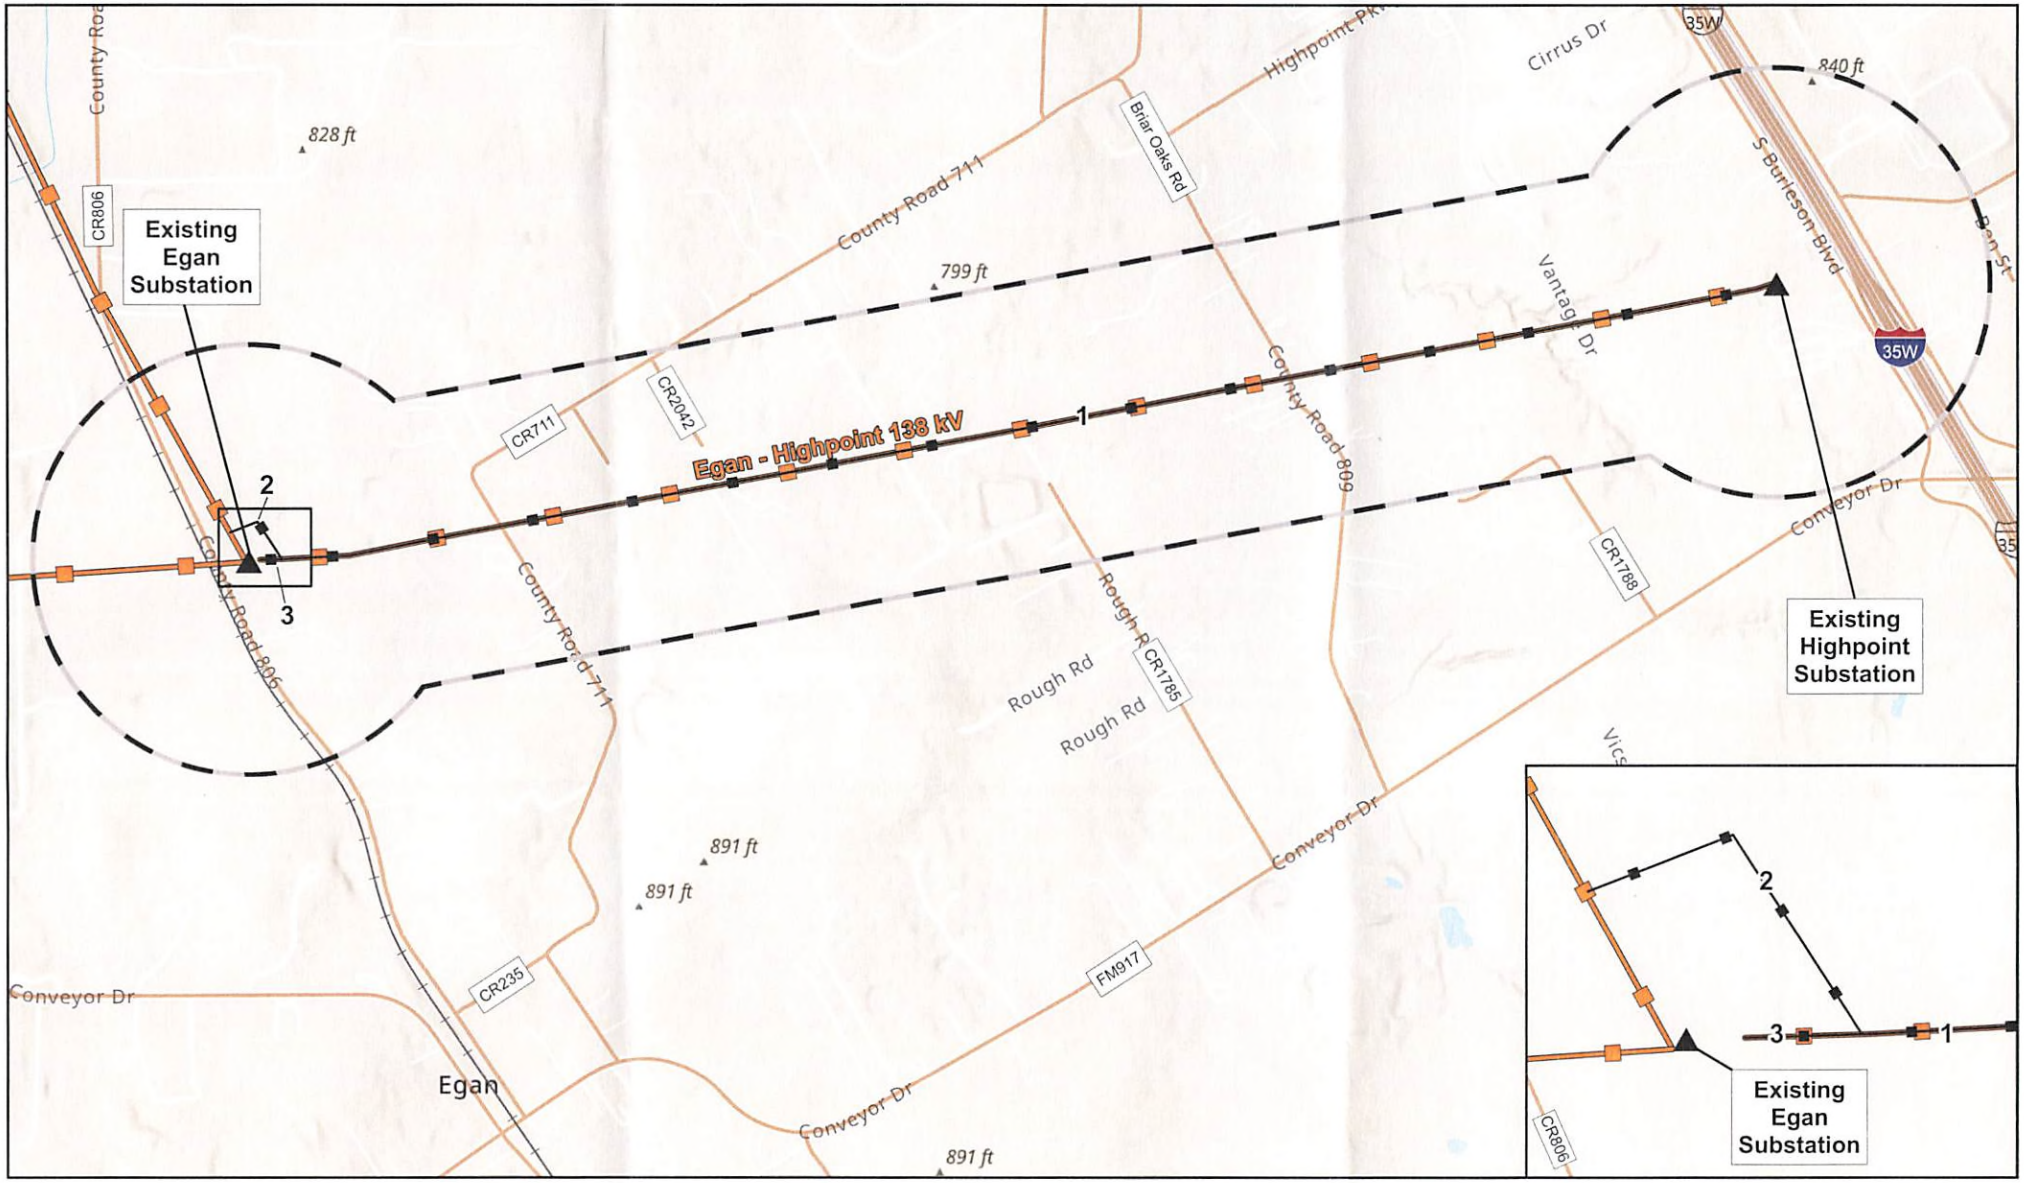

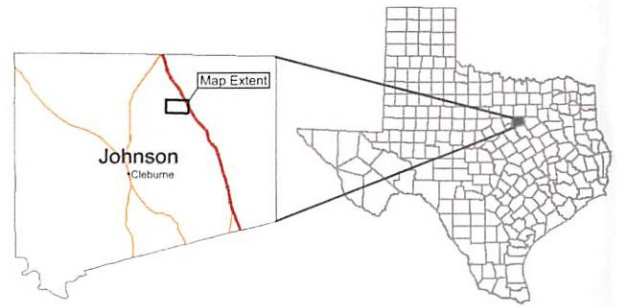

Study Area
Existing Substation
Proposed Transmission Line Rebuild
Existing 138 kV Transmission Line
Federal Highway
Local Road
Railroad

0 1,000 Feet
Scale: 1:16,000
N

Notes:
1. Coordinate System: NAD 1983 Texas Statewide Mapping System (Meters)
2. Data Sources: Oaklight (2026), TxDOT (2025)
3. Background: USGS Topographic Map (2025)

Egan to Highpoint 138kV Transmission Line Rebuild Project

Egan to Highpoint 138kV Transmission Line Rebuild Project
Johnson County, TX

Brazos Electric Cooperative

8/17/2026

Oaklight

Author: R. James Project: 26004

Route Composition

Transmission Line Route	Link Combination
Proposed Route	1-2-3

Route Description

Brazos Electric proposes to rebuild approximately 2.13 miles of an existing single-circuit 138 kV transmission line on wood poles to a 138 kV double-circuit transmission line on single-pole steel or concrete structures between the existing Egan and Highpoint Substations.

Link 1:
Link 1 begins at the existing Highpoint substation, west of Interstate 35 (I-35) and about 1,973 feet north of the I-35 and Conveyor Drive intersection. The link follows the existing Highpoint-Egan 138 kV transmission line centerline, exiting the Highpoint substation on the western side and running slightly southwesterly for 126 feet to a slight angle point. It then continues southwesterly for 9,983 feet, still following the existing line. It crosses five natural gas pipelines seven times, two unnamed streams, Vantage Drive, County Road (CR) 809, CR 711D, and CR 711, until it reaches a slight angle point. The link continues west for approximately 469 feet before terminating at the intersection with Links 2 and 3. Link 1 includes a double-circuit 138 kV transmission line.

Link 2:
Link 2 begins at the intersection with Links 1 and 3, heading northwest for 312 feet to an angle point, crossing a natural gas pipeline. From the angle point, Link 2 runs 204 feet southwest, crossing the same pipeline again, and terminating at the HF tower on the existing Brazos Electric Egan to Burleson 138 kV transmission line, located on the east side of CR 806 and north of the existing Egan substation. Link 2 includes a single-circuit 138 kV transmission line.

Link 3
Link 3 begins at the intersection with Links 1 and 2, running west for 155 feet continuing along the existing Highpoint-Egan transmission centerline and terminating at the Egan substation, where it enters on the eastern side. Link 3 includes a single-circuit 138 kV transmission line.